

GRAIN BAG UNLOADER

AKRON[®]
Efficiently Moving Grain



akronag.com

EX3600

- **Modern design:** simple and versatile operation.
- **Heavily reinforced chassis:** allows an easier unloading operation and minimizes the risk of bag damage.
- **Bottom angular gearbox and grain pusher:** simplify the augers' performance and ensure a better end of bag.
- **Independent hydraulic controls.**
- **Hydrostatic movement:** The machine moves automatically as the bag is winded up by the roll. The speed of movement can be adjusted.
- **Single operating and transport position.**
- **Tires:** 215/75-15".
- **Electrostatic polyurethane paint.**
- **Auger configuration specially designed for tough grain.**



ESPECIFICACIONES TÉCNICAS


**Great Capacity!!!
360 tonnes/hour**

It fully winds up the grain bag.

Automatic movement independent of the tractor traction.

| | |
|---------------------------|--|
| For bags of | 9 feet |
| Unloading performance | 360 tonnes/hour - 13,230 bu/hour |
| Power required | 75 HP |
| Tube / Auger diameter | 400 mm / 15 ³ / ₄ in |
| Horizontal Auger diameter | 260 mm / 10 ¹ / ₄ in |

AKRON may change specifications and product designs in this or other brochure at any time, without previous notice. Pictures shown are for illustration purposes only.

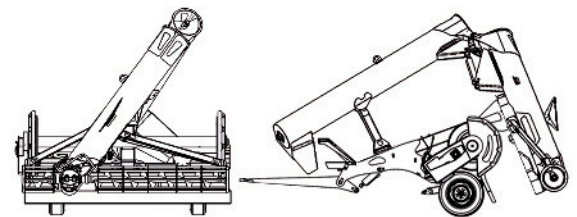

Rosario de Santa Fe 2256
X2400EFN San Francisco CBA, Argentina
Tel/Fax: + 54 3564 498502
export@akron.com.ar

akronag.com



Height adjustment through hydraulic cylinder.



Grain Pusher. It ensures a better end of bag.



Independent hydraulic controls. Speed Control Valve.



Bag Deflectors.